

Continental Portuguese Territory Flood Susceptibility Index - Contribution for a Vulnerability Index

Jacinto, R., Grosso, N., Dias, L., Costa, H., Reis, E., Garrett, P.

Abstract

This work defines a national flood susceptibility index for the Portuguese continental territory, by proposing the aggregation of different variables that represent natural conditions for permeability, runoff and accumulation. This index is part of the national vulnerability index developed in the scope of Flood Maps in Climate Change Scenarios (CIRAC) project, supported by the Portuguese Insurance Association (APS).

This approach expands on previous works by trying to bridge the gap between different floods mechanisms (e.g., progressive and flash floods) occurring at different spatial scales in the Portuguese territory through: a) selecting homogeneously processed datasets that reflect the underlying variables behind those different mechanisms and; b) aggregating their values to better translate the spatially continuous and cumulative influence in floods at multiple spatial scales.

Results show a good ability to capture, in the higher susceptibility classes, different flood types: a) progressive floods in the main Portuguese rivers and adjacent regions, dominated by the high water accumulation potential and lower slope areas and; b) flash floods in the major cities, related to superficial flow generation heightened by the high percentage of impermeabilized urban surfaces. Lower values are usually related to mountainous areas or with low water accumulation potential and also with more permeable soils. Validation with independent flood datasets confirmed these index characteristics, although some overestimation can be seen in the southern region of Alentejo where, while susceptibility values are usually medium/high, due to a dense hydrographic network and an overall low slope, floods are not as frequent as a result of lower precipitation mean values and consequently lower river flows.

Future work will focus on the inclusion of extreme precipitation datasets to represent the triggering factor and on improving representation of smaller and steeper basins by including spatially distributed information on flow concentration time. Furthermore it will attempt to optimize the variable weight definition process and; develop more robust independent flood validation datasets.

Keywords: Flood Susceptibility Index, CIRAC, Flash Floods, Progressive Floods, Portugal.

1. Introduction

Hydro-meteorological events such as floods and storms, are the most frequent natural disaster in Europe (IPCC, 2012), responsible for two thirds of the damages and costs associated with all types of natural disasters (EEA, 2012). Those costs have been growing since 1980, as a result of human activities and the increasing severity and frequency of floods (EEA, 2012). Floods frequency and severity are expected to continue increasing due to climate change, even in regions, like Portugal, where mean annual rainfall will probably decrease (EEA, 2012; IPCC, 2012).

In Portugal the growing concentration of people and activities along with soil impermeabilization, especially in urban areas, are responsible for a current increase in flood hazard and losses (Quaresma, 2008; EEA, 2012, 2012a; Jacinto et al., 2012). At the same time, the 100 year return period flood discharge maximum level and consequent flood related losses are expected to further intensify, until the end of the century, under climate change scenarios, when compared to 1961-1990 period (EEA, 2012). For example, several Portuguese cities with more than 10000 inhabitants are estimated to have more than 10% of its area flooded if the rivers rise 1 m (EEA, 2012a).

The focus of this work will be on susceptibility to floods, for the Portuguese continental territory, which is defined as the propensity of an area to be affected by floods. This propensity is given by the territory intrinsic characteristics such as slope, geology, river network, and land use. The present work is part of a flood vulnerability study for the Portuguese continental territory, developed in the Flood Risk Mapping in Climate Change Scenarios (CIRAC¹) project.

Section 2 presents a state of the art review of concepts and methods implemented to translate flood susceptibility and its relation with flood vulnerability and provides insight on the current work contribution to improve flood susceptibility mapping at the national scale. Section 3 is divided into three subsections describing the study area hydromorphological characteristics, the different used datasets and the methodology followed to design and implement the national susceptibility index map. Section 4 presents the main results, including intermediate and final index maps, provides a first overall interpretation of its advantages and limitations and validates them through a comparison with historical flood events. Finally section 5 analyses the main findings, the contributions for the state of the art and the impact of the results in the Portuguese context.

2. State of the Art

The crucial factor on turning a flood on a potential damaging event for communities and ecosystems is the proximity to prone areas such as floodplains which determines their vulnerability to the phenomena (Cutter *et al.*, 2008). The IPCC (2012) presented vulnerability as being the “predisposition, susceptibilities, fragilities, weaknesses, deficiencies, or lack of capacities that favor adverse effects on the exposed elements”. This is a general concept that introduces susceptibility as one of the different dimensions that contribute to and should be contained in a vulnerability assessment (Figure 1). Adger (2006) also relates both concepts by defining vulnerability as the susceptibility to harm from exposure to a change on the environment or on the society and the incapacity to adapt to those changes. The juxtaposition and interdependency between vulnerability and susceptibility is evident, leading sometimes to inconsistencies in their definition, depending on the researching perspective.

¹ The CIRAC project provides a first overall interpretation of its advantages and limitations and validates its results through comparison with historical flood events and areas maps and databases. Aims to produce vulnerability and risk maps under climate change scenarios and is supported by the Portuguese Insurance Association (APS).

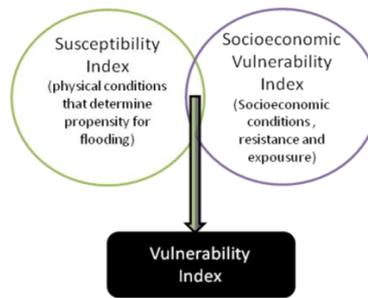


Figure 1 - Components of a vulnerability Index

For instance, according to Balica *et al.* (2012), “a system is susceptible to floods due to exposure in conjunction with its capacity/ incapacity to be resilient, to cope, recover or adapt to (...)”. The authors connected susceptibility with exposure, considered as the hydro-geological component, and also with the institutional and socio-economic systems.

Collier and Fox (2003), despite not discussing directly the susceptibility concept, identified some components to describe a baseline susceptibility to flash floods that were mostly derived from inherent characteristics of a specific basin. Those characteristics are: the likelihood of unimpeded flow and the existence of channel constrictions, catchment slope, ratio of catchment area to mean drainage path length, ratio of land use to vegetation type as a proxy of urban extension. This approach to susceptibility leads to the definition adopted in this work and also identified in other studies (Verde and Zêzere, 2007; Zêzere *et al.*, 2005), where flooding susceptibility is a characteristic of an area, given by its natural terrain configuration and occupation and that determines its propensity to flooding.

The several steps included in the methodological approach to susceptibility estimation, from variable and source data selection, to the composition of indicators, depend not only on the chosen definition of susceptibility but also on the spatial scale of analysis. National assessments are usually designed to provide a high level picture of flood susceptibility and are unable to represent in a consistent manner the different flooding mechanisms (e.g, urban flash floods versus progressive floods). For instance, when working susceptibility mapping at European level, Roo *et al.* (2007) and Marchi *et al.* (2010) used topography to characterize the flooding phenomena. They used SRTM-3 combined with (Roo *et al.*, 2007) other generalizable topographic factors such as catchment slope, the ratio between the catchment area and the mean drainage path length (Marchi *et al.*, 2010). In contrast, at the watershed scale, a wider range of site specific data and indicators can be used, like the ones selected by Yahaya *et al.* (2010) and Santangelo *et al.* (2011), with several data sources like precipitation, river network, slope, soil type and land use. This allows for a better characterization of the flooding phenomena in that basin but hinders the generalization of the methodology to other areas.

In Portugal there are limited academic works on floods vulnerability or susceptibility evaluation. Sá and Vicêncio (2011), presented an approach for mapping flood risk and vulnerability for each municipality of the Portuguese continental territory, using information on the 100 year return period precipitation for each district (group of municipalities), urban land use percentage for each municipality (obtained from Corine Land Cover data), mean number of floods registered by the National Civil Protection Authority (ANPC), river length (in kilometers) compared to the area of the municipality and the number of inhabitants in each municipality. Other academic work, for smaller study areas, analyzed the vulnerability to floods

in Águeda Municipality and used the floodable areas of the National Ecologic Reserve to represent susceptibility to floods (Figueiredo *et al.*, 2009).

The work presented here contributes to the improvement of the current state of the art in the susceptibility evaluation field by designing and implementing, for the first time, a flood susceptibility index for the Portuguese territory. Some innovative methodological features are also introduced to overcome the limitations stated above, regarding the determination of flood susceptibility at a national scale. Variable selection tries to reflect the different flood dynamics that occur in the Portuguese territory. Selected parameters include flow accumulation potential, topographical and land use/soil permeability characteristics, representative of processes at different scales and influent in both progressive and flash floods. This selection process also takes into account the need to reduce index complexity by choosing fewer input variables and select datasets that are uniformly processed across the Portuguese territory, to minimize index misinterpretation due to possible spatial inconsistencies at a country scale. Finally, the presented methodology applies an aggregation methodology to some of the chosen variables, described in more detail in section 3.3, to better represent the spatially continuous and cumulative nature of their influence in flood generating mechanisms, across increasingly higher spatial scales.

3. Materials and Methods

3.1 Study area

The study area is the continental Portuguese territory (Figure 2(i)), part of the Iberian Peninsula, located in the southwest of Europe.

Historically, and due to climatic characteristics, this territory has frequently registered flood occurrences. According to Quaresma (2008), during the period between 1900 and 2006 the annual average of hydro-geomorphological occurrences with losses in the Portuguese continental territory has been growing. For a similar period (1900-2008), Quaresma and Zêzere (2011), concluded that 82% of the hydro-geomorphological events in Portugal mainland were floods.

In mainland Portugal different kinds of hydrologic extreme events occur, varying from those with slow spreading and large duration, normally extending to large areas (so-called progressive floods), and those with very fast spreading, short duration and concentrated impact (flash flood events) (Ramos and Reis, 2001; Ramos and Reis, 2002). The flash floods events occur mainly on small watersheds or in urban areas and the progressive floods occur usually at a larger scale such as the Tagus, Guadiana, Mondego and Douro basins (Figure 2(ii)). The topography of the Portuguese territory is steeper to the north of the Tagus River and flatter in the South, especially in Alentejo region, between the rivers Tagus and Mira (Figure 2(iii)).

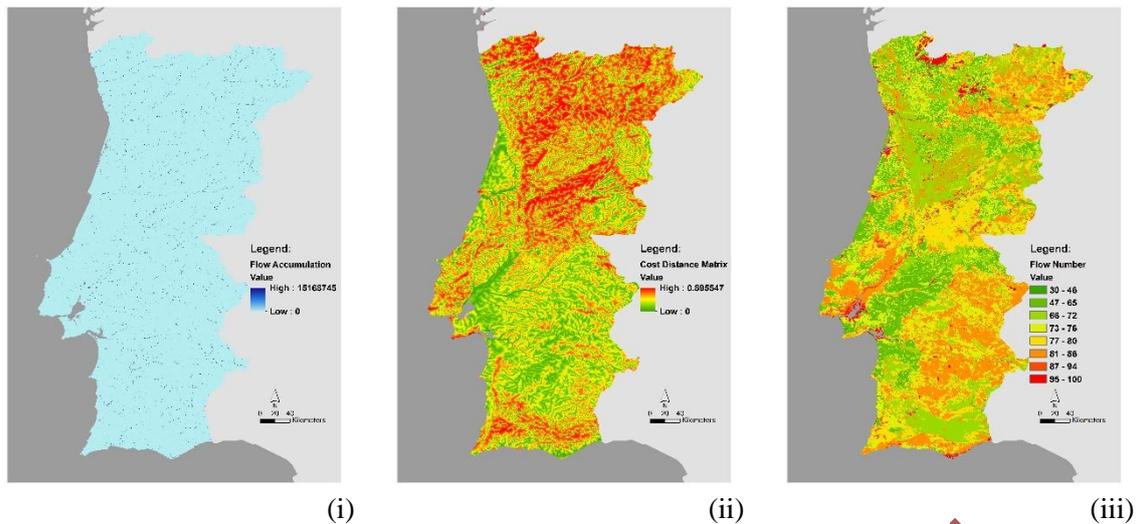


Figure 3 – Maps of the original variables used in the flood susceptibility index: i) Flow Accumulation ; ii) Cost Distance Matrix; iii) Flow Number

Flow Accumulation shows the accumulation paths and the amount of cells in the entire basin that contribute to the flow on a specific cell. In the case of an international river, this variable accounts for both the Portuguese and international parts of the basin. It represents the drainage network and its water accumulation potential. Therefore, an increase in flow accumulation should reflect an increase in flood susceptibility (Lehner *et al.*, 2008). Accumulation values are representative of the entire territory and although represented by a spatially continuous grid, the range of values is very wide, making the small rivers visually imperceptible, due to their small flow accumulation values when compared with the bigger ones as Tagus, Douro or Guadiana rivers (Figure 3(i)). For this reason this variable is more representative of flood events associated with progressive floods in main Portuguese rivers.

The cost distance matrix (Figure 3(ii)) was obtained using the cost distance ArcGIS tool, based on the hydrography and slope themes. It represents the topographic resistance to water lateral movements associated with overflow processes during floods and inundations and also identifies more flood prone accumulation areas in the proximity of water courses. The cost value is calculated for each 90 m cell based on two factors: a) the original slope and b) the distance to the drainage network derived from Hydrosheds. It varies between 0 and 1, where lower cost distance can be found in flat areas, closer to the water courses values, corresponding to areas with higher susceptibility to be flooded. The resulting matrix complements the information given by flow accumulation, since it locates potential water accumulation areas in the regions contiguous to the drainage network. Lower cost distance values, corresponding to flat areas, can be found, for instance, in the region between the Tagus River and Algarve Region (Alentejo) as well as the occidental coastal part of the territory. In the specific case of the Alentejo region there is an apparent disagreement between the relatively sparse hydrographic network represented in Figure 2(i) and the high frequency of low cost distance values. This is due to the presence of a numerous impermanent rivers in the drainage network map derived from DEM information, when compared with the permanent river network.

The flow number dataset for the national territory was collected from the Water Atlas online, made available by the Portuguese Water Institute (<http://geo.snirh.pt/AtlasAgua/>). It was produced by the Portuguese Environment Institute, based on two maps:

1. the hydrological soil type divided in four classes (A, B, C and D), according to the Soil Conservation Service classification, with increasing capacity to generate superficial flow (US Soil Conservation Service, 1986);
2. the Corine Land Cover 2000 (CLC2000) map (Instituto do Ambiente, 2005).

The final Flow Number map (Figure 3(iii)) was determined, following the work done by Lobo-Ferreira (1995), based on a reclassification that combines the two parameters. Further details on the production of this theme are given in the Water Atlas website². The values are adimensional and range from 59 to 100, with higher values corresponding to higher soil permeability. This variable is representative of conditions at smaller local scale and is particularly important to translate, for instance, the higher superficial flow generation potential in urban impermeabilized areas.

The Portuguese Water Atlas also provided: a) inundated area maps for the 100 year return period flood for some of the main Portuguese rivers (e.g., Tagus, Mondego, Sado, Zêzere e Vouga); and b) a flood occurrences point map, produced by the Water Institute, based on events registered by the National Civil Protection Association (ANPC) and on information gathered from periodic journals (Figure 4(i)). The first was used to adjust the final index composition based on different variable weights and to help define the interval range of each final susceptibility class. The second was used to validate the index results, together with a database, provided by Quaresma (2008), containing the number of events with considerable damages per municipality that occurred in the last century (Figure 4(ii)).

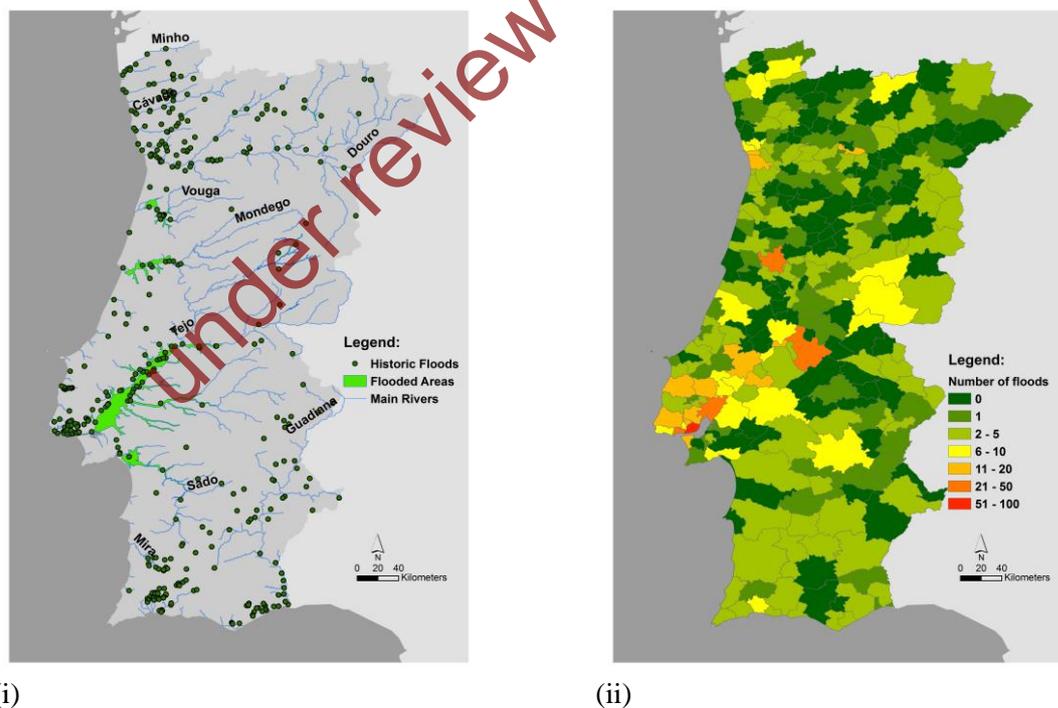


Figure 4 - External flood datasets used in this work: i) inundated area for the 100 year

² <http://geo.snirh.pt/AtlasAgua/download/ProducaoNumerosEscoamento.pdf>

return period flood in the main Portuguese rivers and flood historical points based on Civil Protection registries and information from journals; ii) number of occurrences with considerable damages per municipality that occurred in the last century (adapted from Quaresma, 2008).

Table 1 summarizes all information regarding the different datasets used in this work.

Table 1 – Information summary for all used datasets.

Variable	Source	Original Resolution	Spatial	Role in index calculation
Auxiliary Variables				
DEM	Hydrosheds website (http://hydrosheds.cr.usgs.gov/)	3 arc-seconds (≈90 m)		Auxiliary variable to calculate the Slope theme.
Slope	Calculated based on the Hydrosheds DEM	3 arc-seconds (≈90 m)		Auxiliary variable to calculate Flow Direction and Accumulation , Hydrography
Flow Direction	Calculated based on the slope	3 arc-seconds (≈90 m)		Auxiliary variable used to define the Hydrography and Flow Accumulation
Hydrography	Calculated based on flow direction	3 arc-seconds (≈90 m)		Auxiliary variable used to define the Cost Distance
Main Variables used in Flood Susceptibility Index				
Flow accumulation	Derived from the Hydrosheds DEM and Flow Direction themes	3 arc seconds		Definition of water accumulation areas
Cost Distance	Derived from the Hydrography and Slope themes	3 arc seconds		Difficulty associated to water lateral movements in overflow processes
Flow number	Portuguese Water Atlas (http://geo.snirh.pt/AtlasAgua/)	500 m		Soil Permeability

A decision was made not to include a precipitation dataset in the index formulation since its purpose was to reflect only the terrain morphological characteristics that influence flood susceptibility, regardless of the magnitude and spatiotemporal variation of flood triggering factors. This also allows the possibility of including, on a later stage, a precipitation theme or a combination of precipitations themes (e.g., mean annual precipitation or a set of maps with the

interpolated ground station precipitations for different return periods and durations (Brandão *et al.*, 2001)) to better reflect flood susceptibility for any specific climatological time period.

3.3 Methods

The main objective of the methodology presented in this section is to produce, using the above described datasets, a spatially continuous flood susceptibility index for the Portuguese territory, varying from 0 to 1, where the highest values correspond to a higher flood propensity. To achieve this, a four stage approach was followed, including: a) an aggregation process for the flow number dataset to better represent, for each cell, the cumulative influence of its upstream to downstream spatial distribution; b) a normalization process for all variables to rescale them to common 0 to 1 range, where higher values represent areas more susceptible to floods; c) an expert analysis based variable weight definition technique to establish the importance of each individual variable in the final index; d) the definition of four susceptibility classes by comparison with inundated areas maps developed for the Portuguese main rivers and urban areas and; e) an index validation procedure by comparison with other independent flood datasets.

The first methodological phase corresponded to one of the main innovative aspects of this work: the application, for the entire Portuguese continental territory, of a variable spatial aggregation method, based on the one developed by Reis (2011) and already implemented for basin scale studies in regional (e. g. Ramos *et al.*, 2009, 2010) and municipal (e. g. Ascenso, 2011) contexts. This approach improves substantially the depiction of the cumulative nature of the flooding phenomena (from upstream to downstream) and provides a good framework to introduce basin scale features as a driver for variables dynamics at a wider national scale. Using the flow direction theme to determine the flow accumulation path, an accumulated value is calculated for each cell corresponding to the sum of the variable value for all cells upstream. This method is inherent to the calculation of the flow accumulation theme and it's not applicable to the cost distance theme, since the nature and influence of this variable is noncumulative. Therefore it was only applied to the flow number and, because this variable should be representative of soil permeability conditions at a basin scale, the calculated accumulated value for each cell corresponded to the mean of all upstream cells instead of the sum.

Each independent variable was normalized to a common 0 (low susceptibility) and 1 (high susceptibility) interval, according to their minimum and maximum values (Figure 5).

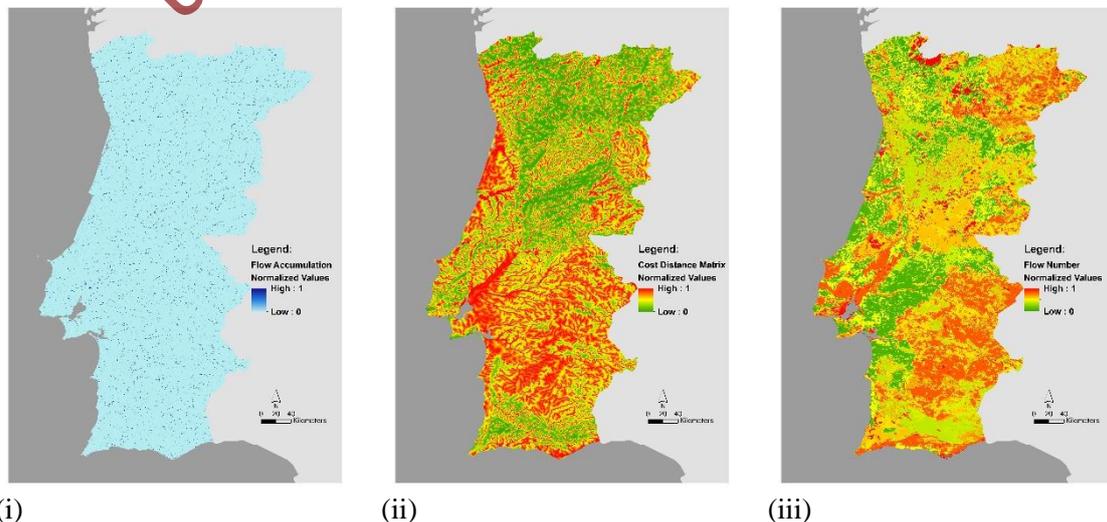


Figure 5 - Normalized variables used in the flood susceptibility index: i) Flow Accumulation ; ii) Cost Distance Matrix; iii) Flow Number.

The definition of variables weights for the final composition of the index was based on an iterative comparison process (Reis, 2011) with the 100-year flood inundation area map for the main Portuguese rivers.

The final step to arrive to a flood susceptibility index for the Portuguese territory was to define four classes. The definition of those classes was made based on a comparison with the already mentioned 100-year flood area maps dataset and on an empirical analysis of the physical characteristics of the Portuguese territory. Finally an overall validation of the final results was done by visual comparison of the susceptibility map with two different independent flood datasets.

4. Results and Discussion

Since the first two methodological steps presented in the previous section refer only intermediary preprocessing tasks, only the analysis of the different index composition stages and its respective validation procedure are included in the Results section.

The final variable weights for the composition of the Flood Susceptibility Index, obtained after comparison with flood area maps for the main rivers and expert consultation, heightens the importance of flow accumulation (0.47) and cost distance (0.36), which have a combined weight of 0.83, when related to the flow number (0.17). This fact points towards a possible higher sensitivity of the index to overflow processes usually associated with progressive floods in comparison to superficial flow generation processes that, although also influence in this flood type, are more determinant in flash floods, especially in impermeable urban areas. This will be further investigated during the validation process.

Regarding the definition of the susceptibility classes, the visual analysis of the range of original susceptibility values present inside and outside the limits defined by the 100-year flood area map for the main Portuguese Rivers allowed an accurate assessment of the two higher classes. In fact, most of the values included in those classes are within the limits of those flooded areas. As can be seen in Figure 6, the adjacent areas to all major and medium sized rivers in the Portuguese territory are also included in these higher classes. This demonstrates the index higher propensity to identify regions susceptible to progressive floods due, as stated above, to the higher importance given to the flow accumulation and cost distance variables.

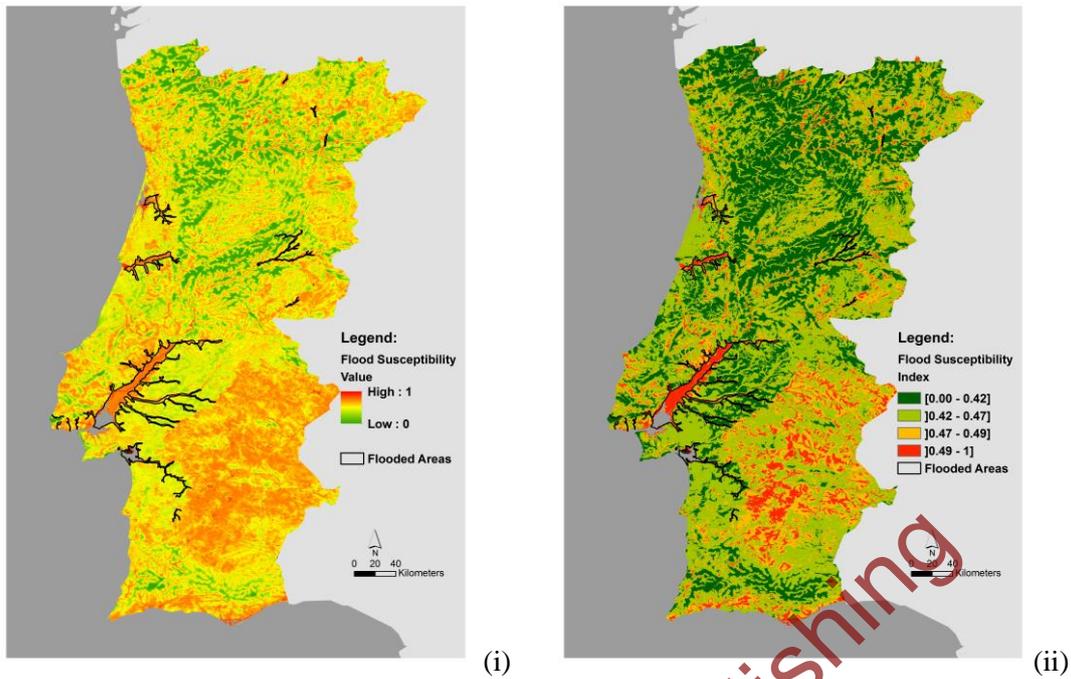


Figure 6 - Comparison between the flood susceptibility index values and the limits of the 100-year flood area map dataset for the main Portuguese rivers considering: (i) a continuous susceptibility scale; (ii) the proposed index classes.

The definition of the remaining classes was made by visual interpretation of the spatial distribution of the index values when compared with maps of the original variables, such as the Hydrosheds DEM, slope and land use. All information related to the final set of classes is given in Table 2.

Table 2 – Flood susceptibility index classes

Class	Area characterization	Index interval	Physical characteristics
4 Very High	+ Differentiation of main water lines + Some main urban areas]0.49; 1]	+ Water Lines and contiguous regions + Regions of impervious soil (e.g. cities)
3 High	+ Differentiation of adjacent flood plains in the main rivers]0.47; 0.49]	+ Flooding regions associated with large rivers + Regions of permeable soil + Regions with high water accumulation potential.
2 Low	+ Areas with increasing distance to water courses and steeper slopes]0.42; 0.47]	+ Regions of medium/low water accumulation + Regions with significant water transport cost distance values + Regions of permeable soil
1 Very Low	+ Mountainous areas or with no water courses in their vicinity]0; 0.42]	+ Regions with no water accumulation potential; + Regions with higher soil permeability + Regions with very high water transport cost distance values

It should be noted that this susceptibility class definition methodology led to unequal interval ranges for the different classes, as can be seen in the third column of Table 2. This was somewhat expected since it was improbable that an index composed of three linearly

normalized and combined variables could translate flood susceptibility in a regular scale. In fact, the variation of influence of each of those variables in flooding processes is, in most cases, non-linear and therefore is associated with very different interval ranges. Therefore their combination would most probably lead, as it was confirmed by this work, to susceptibility classes defined by heterogeneous intervals. Moreover, some of the input variables also have very unbalanced normalized values distributions, namely flow accumulation (high frequency of low values and a few very high values) and cost distance (mostly high values), further distorting the distribution of the final susceptibility values and consequently the definition of the correspondent classes.

In addition to the above mentioned main rivers, Flood Susceptibility Index (Figure 7) for the Portuguese territory also identifies some major cities like Lisbon, Coimbra, Aveiro, Setúbal, Faro and Oporto and some small basin areas in the south part of Portugal (Algarve) as highly susceptible to floods (classes 3 and 4). This showcases the index sensitivity to identify also flash flood prone areas, characterized by highly impermeabilized artificial surfaces situated in plain regions in the vicinity of relevant water courses (see Figure 3, panels (ii) and (iii)). The Alentejo region, east of Lisbon (Figure 2(i)), is also classified as highly susceptible (class 3) due to its topographical and geological characteristics, since most of the territory is plain, with a high hydrographic network density and impermeable rocky (shale and marble) or clay soils.

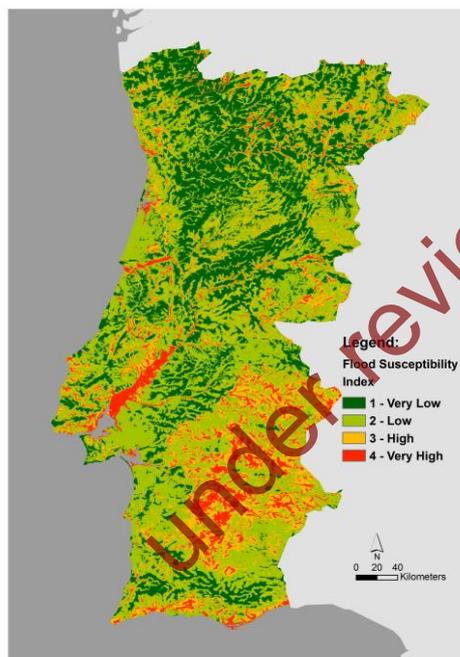


Figure 7 - Flood Susceptibility Index

In the lower susceptibility classes is possible to find: a) the more mountainous regions like Serra da Estrela, in the center of Portugal, between Coimbra and Guarda and some of the northeast of Portugal; b) areas with highly permeable sandy soils, such as the south part of the Tagus and Sado basins and most of the coastal area between Lisbon and Aveiro; or c) combining both those characteristics, in the north central part of Portugal and northern part of Algarve.

Validation of the Portuguese flood susceptibility index against the flood events point dataset provided by the Water Institute showed a general good direct correspondence between the frequency of flood points and the magnitude of susceptibility values in the vicinity of those points (Figure 8(i)). Looking in greater detail the index confirmed its ability to capture: a) a higher flood susceptibility associated with the main Portuguese rivers and their adjacent areas (example given for the Tagus basin in Figure 8(ii)); and b) flash flood prone urban areas like Lisbon and Setúbal (Figure 8 (iii)).

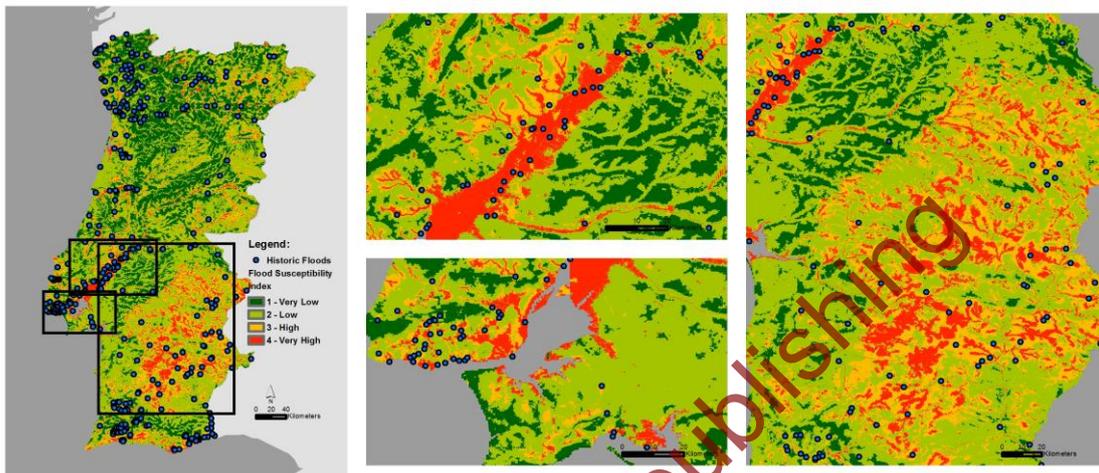


Figure 8 - Comparison of the Flood Susceptibility Index with the flood events map provided by the Water Institute for: (i) Portugal; (ii) Tagus Basin; (iii) Cities of Lisbon and Setúbal; (iv) Alentejo region.

In the case of Alentejo, while some flood points can be found along the rivers Guadiana and Sado and some of their tributaries, there is an apparent overall inconsistency between the high flood susceptibility values and the corresponding number of flood points. This arises from the nature of the index which reflects the flood propensity associated with terrain characteristics and excludes flow or precipitation quantitative information. Since, although dense, most of the hydrographic network in Alentejo is characterized by a low flow regime with a high seasonal variation, driven by low mean annual precipitation, this artifact is to be expected.

Finally the flood dataset compiled by Quaresma (2008), representing the number of high magnitude flood events per municipality in the last century (Figure 4) shows a good correspondence between the spatial variation in both datasets, particularly in the Tagus basin and in the Lisbon and Oporto regions. Nevertheless the inconsistency in the Alentejo region is also visible in the comparison with this flood map. It should be noted that both validation datasets used in this analysis have a bias towards more densely populated areas since they are compiled from information gathered in journals and civil protection registries and misrepresent flood occurrence in rural and natural areas with lower human presence.

5. Conclusions

The development of a national flood susceptibility index entails several challenges related to difficulties in capturing the different flood dynamics usually occurring in a wide territory across

different spatial scales. The work presented here presents a first attempt to implement this type of index for the Portuguese continental territory.

The first results are very promising with a consistent representation of the overall spatial distribution of flood susceptibility. The presented methodological approach addresses some of those scale issues by applying a spatial aggregation methodology that better characterizes the cumulative influence of the different variables across spatial scales (from cell to basin and higher). Furthermore the selection of only three variables that represent water accumulation potential, topography and soil permeability allowed for a clear interpretation of the index and an apprehension of different flooding phenomena, ranging from progressive floods in large rivers to urban flash floods.

Nevertheless some possible overestimation of flood susceptibility in regions of low precipitation was observed and should be addressed in future work by including appropriate precipitation datasets such as interpolated ground station precipitations for different return periods and durations (Brandão *et al.*, 2001). Other developments to be implemented in the future will be focused on improving the representation of the higher susceptibility associated with smaller basins or with steeper slopes due to a higher superficial flow generation potential and smaller concentration times. In the future, this could be overcome by the inclusion of two themes containing spatially aggregated values of slope (accumulated mean) and concentration time (accumulated sum), following the methodology used in this work.

Future work will also include: a) the minimization of possible index distortion and subjectivity in the definition of the final susceptibility classes using reclassified variables, according to their influence in susceptibility, instead of a continuous scale; b) the optimization of the variable weight definition process based on the work of Kouriagalas and Karzas (2011) and; c) the inclusion of more robust national flood validation datasets compiled from flood insurance data and more accurate Civil Protection registries.

6. Bibliographic references

Ascenso, Viviana Pereira, 2011. Análise de Ocorrência de Cheias e Deslizamentos de Vertente no Concelho da Batalha. Departamento de Geografia da Faculdade de Letras Lisboa, Universidade de Lisboa. (http://repositorio.ul.pt/bitstream/10451/5956/1/igotul001414_tm.pdf)

Balica, S. F.; Wright, N. G.; Meuden, F. van der, (2012). A Flood vulnerability index for coastal cities and its use in assessing climate change impacts. *Natural Hazards*, ISSN 021-030X, DOI 10.1007/s11069-012-0234-1

Collier, C.G.; Fox, N.I., (2003). Assessing the flooding susceptibility of river catchments to extreme rainfall in the United Kingdom. *International Journal of River Basin Management*, Vol. 1, Iss.3,2003. (<http://www.tandfonline.com/doi/citedby/10.1080/15715124.2003.9635209#tabModule>)

Cutter, Susan L.; Barnes, Lindsey; Berry, Melissa; Burton, Christopher; Evans; Eljha; Tate, Eric; Webb, Jennifer; (2008). *Community and Regional Resilience: Perspectives from hazards, disasters, and emergency management*. CARRI Research Report 1. Hazards and Vulnerability Research Institute, Department of Geography, University of South Carolina, Columbia, South Carolina.

EEA, 2012. Climate change, impacts and vulnerability in Europe 2012. EEA Report No 12/2012. European Environment Agency. (<http://www.eea.europa.eu/publications/climate-impacts-and-vulnerability-2012>).

EEA, 2012a. Challenges and opportunities for cities together with supportive national and European policies. EEA Report No 2/2012. European Environment Agency. (<http://www.eea.europa.eu/publications/urban-adaptation-to-climate-change>).

Figueiredo, E.; Valente, S. ; Coelho, C. e Pinho, L. (2009) “Coping with Risk – Analysis on the importance of integrating social perceptions on flood risk into management mechanisms - the case of the municipality of Águeda, Portugal”. Journal of Risk Research, vol. 12, nº 5, pp. 581 - 602

IPCC, 2012: Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation. A Special Report of Working Groups I and II of the Intergovernmental Panel on Climate Change [Field, C.B., V. Barros, T.F. Stocker, D. Qin, D.J. Dokken, K.L. Ebi, M.D. Mastrandrea, K.J. Mach, G.-K. Plattner, S.K. Allen, M. Tignor, and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, UK, and New York, NY, USA, 582 pp

Jacinto, R., Cruz, M. J., and Santos, F. D., 2012. Water use scenarios as a tool for adaptation to climate change of a water supply company, Drink. Water Eng. Sci. Discuss., 5, 265-289, doi:10.5194/dwesd-5-265-2012, (<http://www.drink-water-eng-sci-discuss.net/5/265/2012/dwesd-5-265-2012.html>).

Lehner, B; Verdin, Kris; Jarvis, Andy (2008). HydroSheds Technical Documentation. Version 1.1. <http://hydrosheds.cr.usgs.gov> (Accessed on November 2011)

Lobo-Ferreira, J.P. C.; 1995. Inventariando, Monitorizando e Gerindo de Forma Sustentável Recursos Hídricos Subterrâneos. LNEC, Lisboa. http://grupo.us.es/ciberico/archivos_acrobat/sevillaHobo.pdf

Marchi, L.; M. Borga; E. Preciso; E. Gaume, (2010). Characterisation of selected extreme flash floods in Europe and implications for flood risk management, Journal of Hydrology, Volume 394, Issues 1–2, 17 November 2010, Pages 118-133, ISSN 0022-1694, 10.1016/j.jhydrol.2010.07.017. (<http://www.sciencedirect.com/science/article/pii/S0022169410004427>)

Quaresma, I. (2008). Inventariação e Análise de Eventos Hidro-Geomorfológicos com carácter danoso em Portugal Continental. Departamento de Geografia da Faculdade de Letras Lisboa, Universidade de Lisboa.

Ramos, C.; Reis, E., 2001 - As Cheias no Sul de Portugal em Diferentes Tipos de Bacias Hidrográficas. *Finisterra*, XXXVI (71):61-82. ISSN: 0430-5027.

Ramos, C.; Reis, E., 2002 – “Floods in Southern Portugal: their physical and human causes, Impacts and Human response”, *Mitigation and Adaptation Strategies for Global Change*, vol.7, nº 3, Kluwer Academic Publishers, p. 267-284.

Ramos, C.; Reis, E.; Zêzere, J. L. , 2009. RESERVA ECOLÓGICA NACIONAL DO OESTE E VALE DO TEJO - ANEXO 4 ZONAS AMEAÇADAS PELAS CHEIAS (ZAC) E PELO MAR (ZAM). (Quadro de Referência Regional da Reserva Ecológica Nacional do Oeste e Vale do Tejo. Comissão de Coordenação e Desenvolvimento Regional do Oeste e Vale do Tejo, <http://www.ccdr-lvt.pt/pt/areas-de-ren---quadro-de-referencia-regional/1913.htm>).

Ramos, C.; Reis, E.; Zêzere, J. L., 2010. RESERVA ECOLÓGICA NACIONAL DA ÁREA METROPOLITANA DE LISBOA - ANEXO 4 ZONAS AMEAÇADAS PELAS CHEIAS (ZAC) E PELO MAR (ZAM)

Reis, E., 2011. Análise de bacias hidrográficas, susceptibilidade à ocorrência de cheias e Sistemas de Informação Geográfica: da definição do quadro conceptual até à proposta de um modelo de avaliação. VIII Congresso da Geografia Portuguesa, Repensar a Geografia para Novos Desafios, Comunicações, Lisboa, pp. 1 - 6.

Santangelo, N.; Santo, A.; Crescenzo, G. Di; Foscarelli, G.; Liuzza; Sciarrotta, S.; (2011). Flood susceptibility assessment in a highly urbanized alluvial fan: the case study of Sala Consilina (southern Italy). Nat. Hazards Earth Syst. Sci., 11, 2765-2780, doi:10.5194/nhess-11-2765-2011, 2011. (<http://www.nat-hazards-earth-syst-sci.net/11/2765/2011/nhess-11-2765-2011.html>)

Sá, L.; Vicêncio, H. (2011). Risco de Inundações - Uma Metodologia para a sua Cartografia. Territorium, 18, pp 270-230. (http://www.uc.pt/fluc/nicif/riscos/Documentacao/Territorium/T18_artg/Luis_Sa.pdf).

Sebald, C. (2010). Towards an Integrated Flood Vulnerability Index – A Flood Vulnerability Assessment.

Verde, J.; Zêzere, J. L.; 2007. Avaliação da Perigosidade de Incêndio Florestal. VI Congresso da Geografia Portuguesa, Lisboa, 17-20 Outubro de 2007. http://riskam.ul.pt/images/pdf/comlivactnac_2007_perigosidade_incendio_florestal.pdf

Yahaya, S.; Ahmad, N.; Abdalla, R.; 2010. Multicriteria Analysis for Flood Vulnerable areas in Hadejia-Jama'are River Basis, Nigeria. European Journal of Scientific Research. ISSN 1450-216X Vol. 42 No.1. pp 71-83.

Zêzere, J. L., A. R. Pereira, P. Morgado (2005). Perigos Naturais e Tecnológicos no Território de Portugal Continental. X Coloquio Ibérico de Geografia, Évora, Universidade de Évora.

under review for publishing